

SPECKTRON

XL 235 ST Short Throw Projector



- 3500 Lumens
- 10,000:1 contrast ratio
- 100" screen @ 1m
- Built in speaker
- XGA resolution



10,000hrs
lamp life



HDMI™
HIGH DEFINITION MULTIMEDIA INTERFACE

Specifications

Specifications	3LCD, 3-chip technology
Brightness (ANSI Lumens)	3500
Native Resolution	XGA (1024 x 768)
Aspect Ratio	4:3 (Native), 16:9/16:10 (Compatible)
Lamp Type	UHP 218W
Lamp Life (H)	5000H (Normal)/10000h (ECO)
Contrast Ratio	Up to 10000:1
Keystone Correction	V: 15° / H: 15° Pincushion/Barrel Corner
Fan Noise(dB) @1m	32 dB(Eco) /38 dB (Nor)
Color Uniformity	80%

Projection Lens

Zoom/Focus	Manual
Throw Ratio	80" @ 0.75m ; 0.46:1
F-Number	F=1.8
Focal Length	f=6.08mm

Interfaces

VGA In	*2
Audio in (mini jack, 3.5mm)	*1
YCbCr/Component	*1 (share with VGA in 1)
Video	*1
Audio in (L/R) - RCA	*2
S-Video	*1 (share with VGA in 1)
HDMI	*2 (One is compatible with MHL)
USB Connector type A	*1 (Memory viewer) /WiFi Dongle (Optional)
USB Connector type B	*1 (Display)
VGA Out	*1 (share with VGA in 2)
Audio Out (mini Jack, 3.5mm)	*1
RS232	*1
RJ45	*1 (Control)

Power

Power Supply Voltage	100-240V @ 50/60Hz
Power Consumption	270W
ECO standby	<0.5W
Network Standby	<3W

Features

Speakers	1 x 10W
Security Bar	Yes
LAN Control RoomView (Crestron)	Yes
LAN Control-AMX Discovery	Yes
LAN Control - PJ Link	Yes
Computer Signal Input	VGA, SVGA, XGA, SXGA, WXGA, UXGA, WUXGA, Mac
Video Signal Input	PAL, SECAM, NTSC 4.43, PAL-M, PAL-N, PAL-60, 480i, 480p, 576i, 720p, 1080p and 1080i

Others

Operating Temperature	0°C - 40°C (35 - ECO)
Store Temperature	-20°C - 60°C
Operating Humidity	20% - 85%
Storage Humidity	10%-85%
Lamp Access	Top
Dust Filter	ESD Filter


Dimensions & Weight

Projector Dimension (W x H x D) mm	347 x 341 x 141
Net Weight (KG)	4

Standard Accessory

Standard Accessories	Power Cord, VGA Cable, Remote Control, User Manual
----------------------	--

XL 235 ST

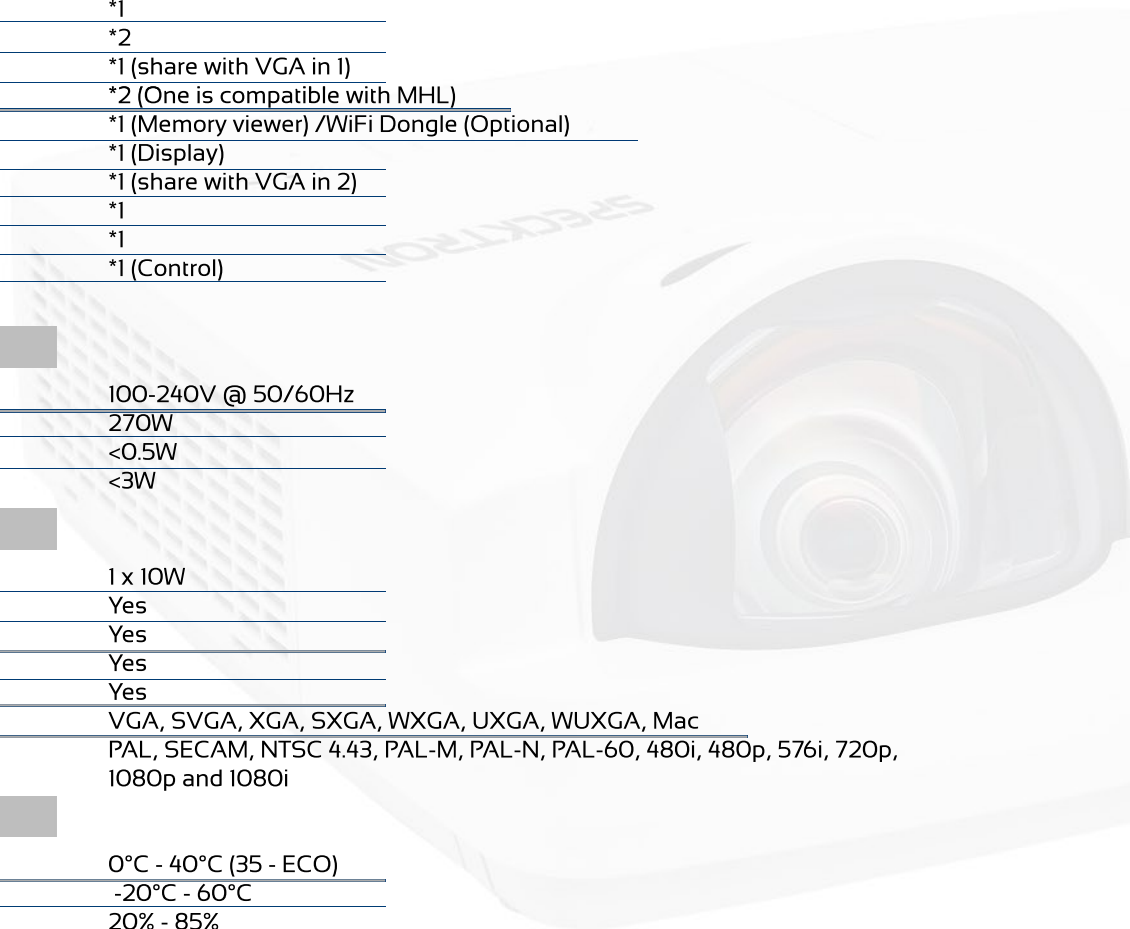

SPECKTRON

www.specktron.com

